

# PRODUCT DATASHEET

## FLOODLIGHT 50 W 4000 K IP65 BK S

FLOODLIGHT SENSOR 50 | Luminaire with symmetrical light output with 50 W and sensor



### AREAS OF APPLICATION

- Replacement for floodlights with halogen lamps
- Car parks and underpasses
- Garages
- Public areas
- Construction areas
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, f. e. by accumulation of dust

### PRODUCT BENEFITS

- Energy savings of up to 90 % compared to halogen lamp floodlights
- Frosted cover made of tempered glass for uniform illumination
- Easy adjustment of range, daylight and motion detection via rotary switch
- 3 years guarantee

### PRODUCT FEATURES

- Luminaire efficacy: up to 110 lm/W
- Symmetrical beam angle: 100° x 100°
- PIR motion and daylight sensor
- Deactivation of the sensor by switch setting
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Impact resistance: IK07
- Ambient temperature in operation: -20...+40 °C



- Connection via 1 m cable, wiring required

**TECHNICAL DATA**

Electrical data

Nominal wattage	50.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Power factor $\lambda$	$\geq 0.90$
Mains frequency	50/60 Hz

Photometrical data

Color temperature	4000 K
Luminous flux	5500 lm
Luminous efficacy	110 lm/W
Standard deviation of color matching	$\leq 5$ sdc <sub>m</sub>
Light color (designation)	Cool White
Color rendering index Ra	$\geq 80$


Light technical data

Beam angle	100 ° x 100 °
------------	---------------

Luminaire sensor data

Type of sensor	Motion / Light
Sensor technology	Infrared/Photocell
Sensor detection angle	110 °
Detection range of motion sensor	0...12 m
Detection threshold of daylight sensor	0...1000 lx
Sensor IP rating	IP65

Dimensions & weight

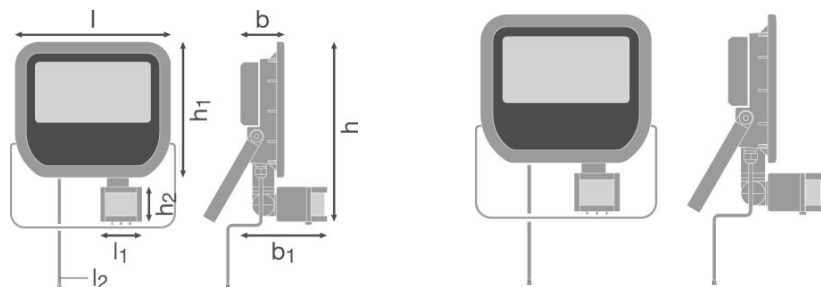

<b>Length</b>	251.0 mm
<b>Width</b>	216.0 mm
<b>Height</b>	122.0 mm
<b>Product weight</b>	930.00 g
<b>Cable length</b>	1000 mm

#### Colors & materials

<b>Body material</b>	Polycarbonate (PC)
<b>Housing color</b>	Black
<b>Product color</b>	Black
<b>Cover material</b>	TEMPERED GLASS

#### Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...40 °C
----------------------------------	-------------

#### Lifespan

<b>Lifespan L70 at 25 °C</b>	50000 h
<b>Lifespan L80 at 25 °C</b>	30000 h
<b>Lifespan L90 at 25 °C</b>	15000 h

#### Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Wall / Floor



#### Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Cable, 3-pole
<b>LED module replaceable</b>	Not replaceable

#### Certificates & standards

<b>Protection class IK (shock resistance)</b>	IK07
<b>Photobiological safety group</b>	RG 0
<b>Protection class</b>	I
<b>Type of protection</b>	IP65
<b>Standards</b>	CB/TÜV SÜD/EAC/RoHS

Light Distribution

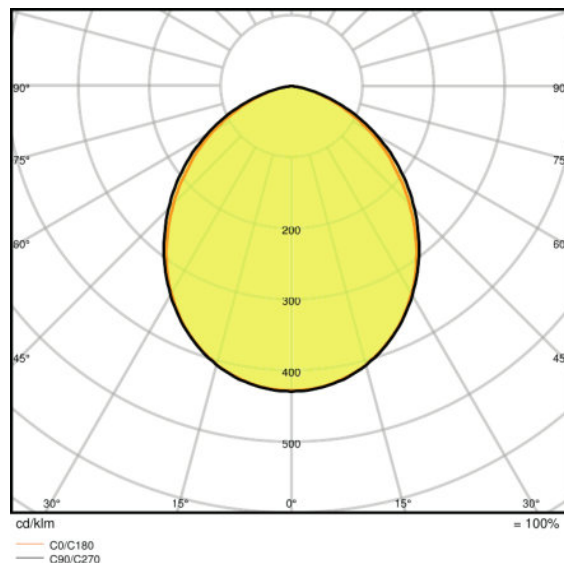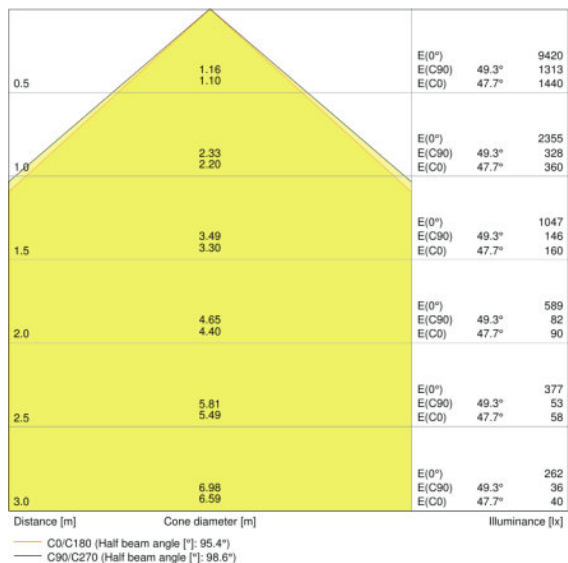

LDC typ cone

LDC typ polar

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075143593	FLOODLIGHT 50 W 4000 K IP65 BK S	Shipping carton box 10	488 mm x 342 mm x 286 mm	47.73 dm <sup>3</sup>	10740.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see  
 ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.